

経歴 Rev.

0

ENGINE SPECIFICATIONS

Engine Model	Engine series 3CB1(Stage 3A / Tier-4)
	Model No. 3CB1-CZP04
Customer	EXPORT
Application	General power
Drawing No.	C1-1022-003-0

Symbol	Date	Revision Record	Issue No.
0	: 6 th Nov. 2008	: For confirmation of volume engine specifications.	:
	:	:	:
	:	:	:
	:	:	:

ISUZU MOTORS LIMITED
Powertrain Business Dept

Approval
S.Nogami
S.Nogami
Group Leader

Check
H.Harada
H.Harada
Manager

Issue
K.Ogawa
K.Ogawa

Engine Specifications

Model No. 3CB1-CZP04

Rev.

0

Engine Model	Model No. 3CB1-CZP04
Application	General power
Approved exhaust emission cert.	EPA, ARB-OR : Tier-4, Stage-3A
Engine type	Four cycle, water cooled, In-line, Indirect injection type
No. of cylinders-bore x stroke	3 - 76.0 mm x 82.0 mm
Total piston displacement	1.116 L
Compression ratio	23.4 to 1

Engine performance

Rating

Test conditions	Standard atmospheric condition
Conforming standard JPN;JIS D0006-1 US;SAEJ1349 EU;ISO15550	With AC generator and cooling fan With air cleaner and exh. silencer

Rated Output	: 18.7 kW / 3200 min ⁻¹
Maximum Torque	: 63.5 Nm / approx. 2300 min ⁻¹
Fuel consumption at rated.	: 292 g/kw.h
No load max. speed	: 3400±25 min ⁻¹
Low idle speed	: 900±25 min ⁻¹
Type of fuel	: Diesel fuel only (JPN:JIS-NO.2, US:ASTM-2D, EU:EN590)
Engine dry weight	: Approx. 112 kg
Dimensions	: L 545.0 x W 450.0 x H 574.0 (With cooling fan)
Firing order	: 1 - 3 - 2 - 1
Rotating direction	: Clockwise viewed from cooling fan

Engine Specifications

Model No.

3CB1-CZP04

Rev.

0

Fuel system

Fuel injection pump	Bosch in-Line
Fuel injection nozzle	Hole type
Fuel filter	Paper element type
Governor type	Centrifugal-all speed governor

Lubrication system

Lubricating system	Forced feed type
Oil grade	API class CC, SAE grade 10W30
Lubricating pump	Trochoid pump type
Oil filter	Paper element
Oil capacity	max : 3.4 L min : 1.8 L
Oil pressure(reference)	3.5 kgf/cm ² at rated output

Cooling system

Heat exchanger	None
Coolant pressure	max. 0.9 kgf/cm ²
Cooling fan	Dia. 335 - 7 - puller, crank pulley/fan pulley = 110/100
Cooling water	0.9 L (engine only)

Air cleaner

None

Breather system

Closed type

Starting aid system

Glow plug

Starter

12V - 1.1kW

Generator

12V - 40A

Allowable inclination angle

Longitudinal : 30(25), Lateral : 30(25)
intermitted, (continuous)

Fuel injection timing

FID 20

Engine color

Black

Engine Specifications

Model No. 3CB1-CZP04

Rev.

0

Loose parts

No.	Parts No.	Item	Qty	Remarks
1	Z29942-07760	Label,Fuel oil caution	1	
2	586400-6330	Gasket, silencer	1	
3	586400-0240	Pump, fuel feed	1	
4	586400-8170	Separator assy, water	1	
5	586400-0550	Diode	1	
6	586400-0560	Relay assy, glow	1	
7	586400-8120	Timer, glow	1	
8	586400-2190	Timer, section 1	1	

ISUZU**3CB1-CZP04 (Tier-4/Stage-3A)
Engine performance curve**

Conditions

Atomospheric conditions

Fan speed ratio

Cooling fan

Air cleaner

Alternator

Exh. silencer

Rating

Standard: JIS D0006 NET

Standard: SAE 1349 NET


110/100=1.1

With (Dia.335-Puller)

With

With

With

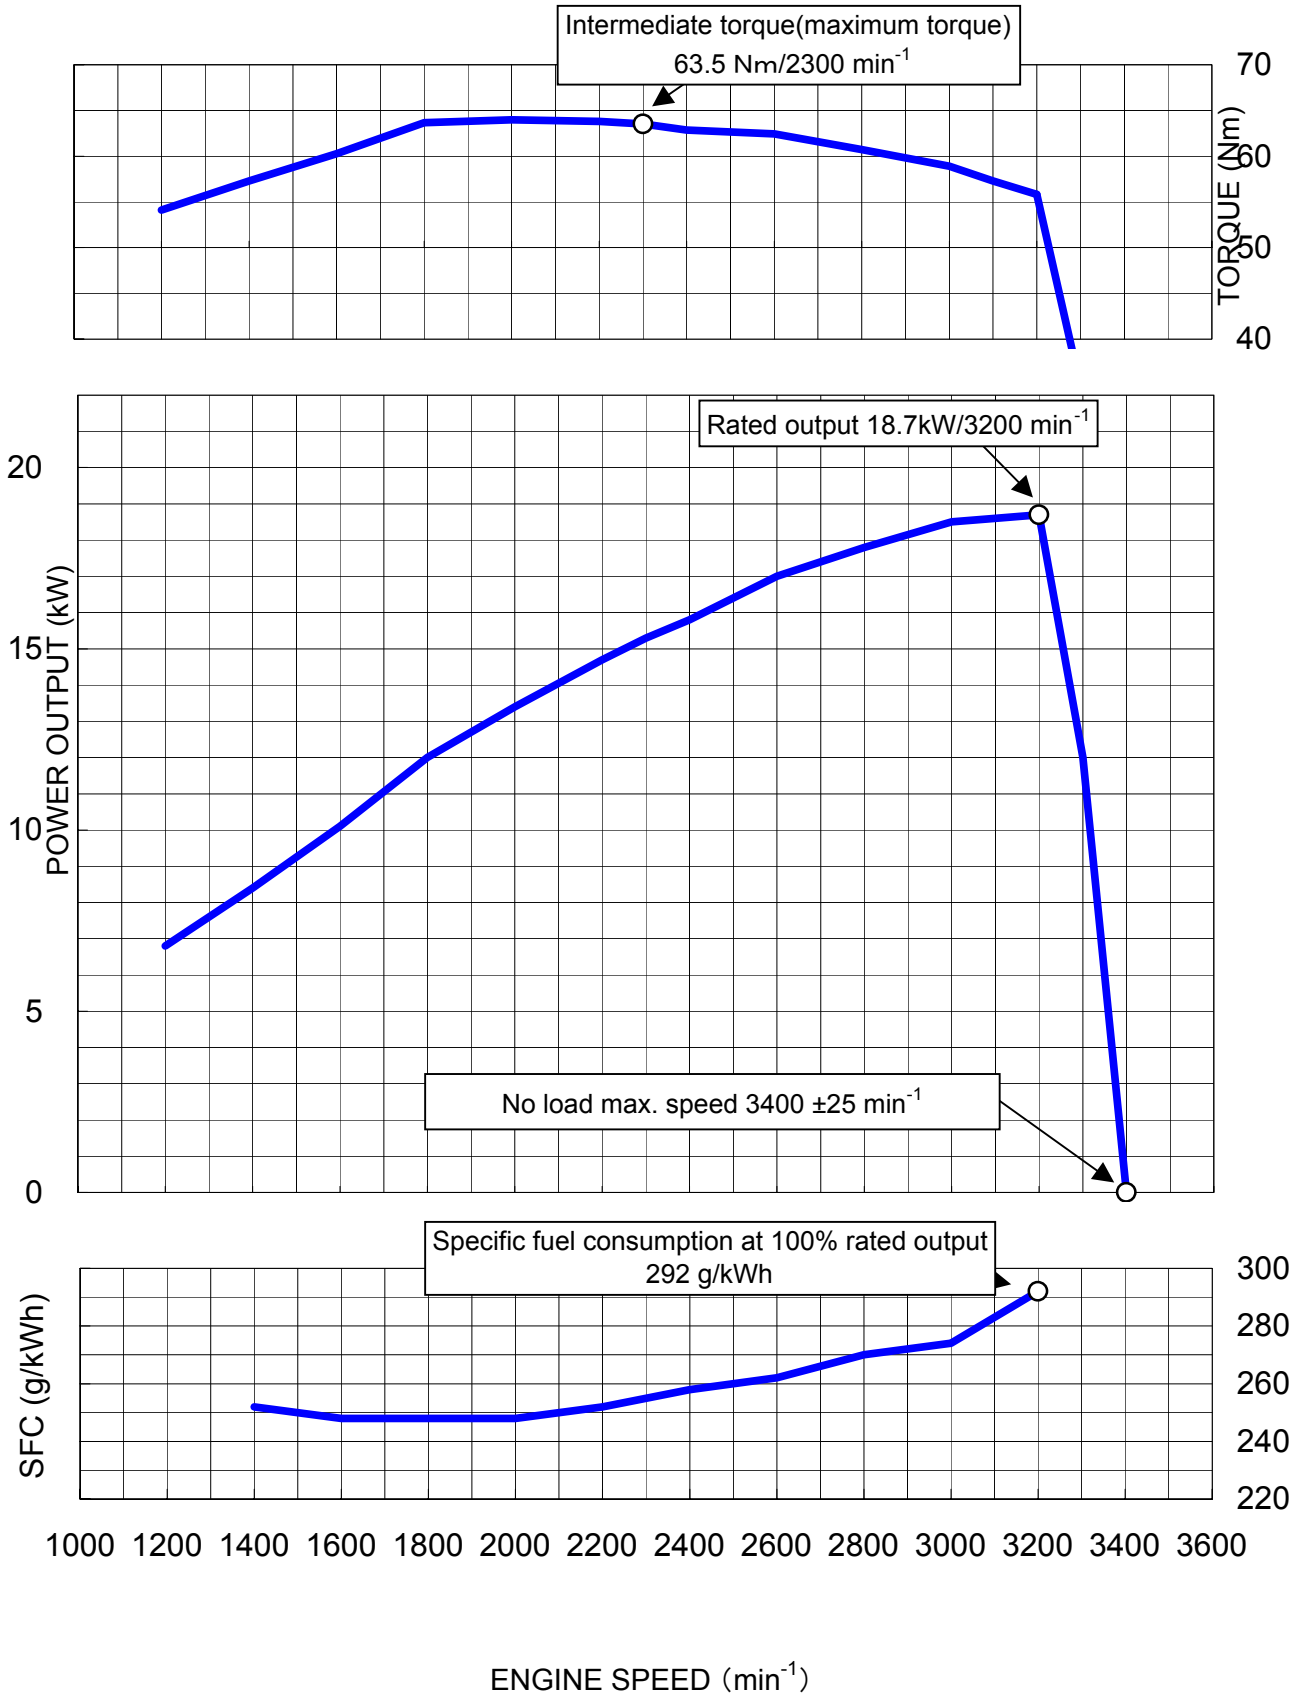

Engine specifications Revision chart

Customer : EXPORT

Engine Model : 3CB1-CZP04

Application : General power

Rev. No.	IS No.	Date	Page	Item	Previous	Current	Description (Reason of change)
0	IS-08-189-0	6th Nov. '08		For confirmation of prototype engine specifications			